REMA C-21 Hand chain hoist



Safety factor of at least 4.8 or higher. Very compact and light body, 5.5 kg 0.5 ton, easy to carry. Strong and dimensionally stable house made of high-quality metal. Durable brake discs guarantee a longer service life. The strongest hoist load chain B39VH, Grade 10. High-quality solid forged hooks with a strong and stable safety latches for even greater safety.

Properties

- Light and compact design.
- Galvanized load chain with high tensile strength, Grade 10.
- Galvanized hand chain.
- Reliable load pressure brake that holds the load at any desired height.
- Patented guide for the load chain.
- Double pawl spring for extra safety.
- Safety latches on top and bottom hook.

Standard delivery

- 3 meters lifting height (max. between top and bottom hook).
- 2.5 meters operating height.


Option

- Available in any other lifting and operational heights.


Norm:

- EN12100-1/2, EN13157, EN818-7


C-21/500 - C-21/2000

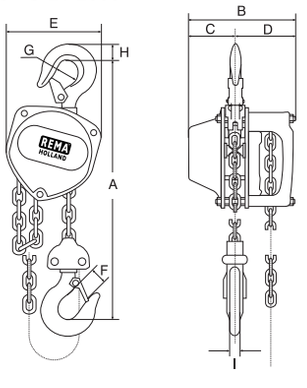

C-21/3000

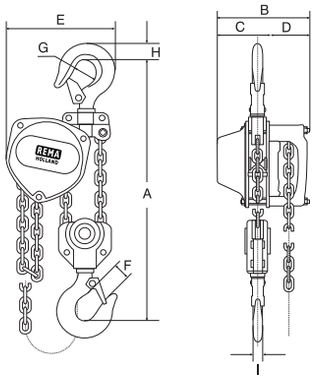

C-21/5000

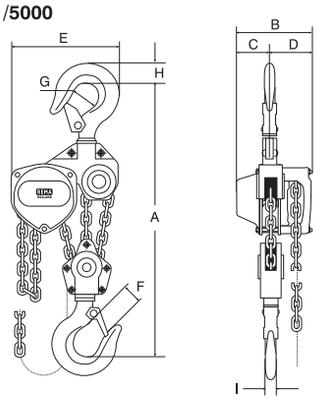

Type	WLL (kg)	Hand force max. (kg)	Load chain (mm)	Number of falls	Operating chain (mm)	Construction height (mm)	Weight (kg)	ProductId
C21-500KG	500	26	4,3 x 12	1	4,5 x 23	275	5,5	0021001
C21-1000KG	1.000	32	5,6 x 17	1	4,5 x 23	310	8,9	0021003
C21-1500KG	1.500	33	6,5 x 19	1	4,5 x 23	340	12,6	0021005
C21-2000KG	2.000	33	7,5 x 21	1	4,5 x 23	384	16,6	0021007
C21-3000KG	3.000	38	6,5 x 19	2	4,5 x 23	480	19,3	0021009
C21-5000KG	5.000	34	7,5 x 21	3	4,5 x 23	555	34,0	0021011

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
C21-500KG	275	131	54	77	121	24	36	17	13
C21-1000KG	310	143	61	82	148	29	43	22	16
C21-1500KG	340	152	68	84	168	29	43	26	21
C21-2000KG	384	164	75	89	193	34	53	29	22
C21-3000KG	480	152	68	84	209	36	53	35	28
C21-5000KG	555	164	75	89	297	45	70	46	34